
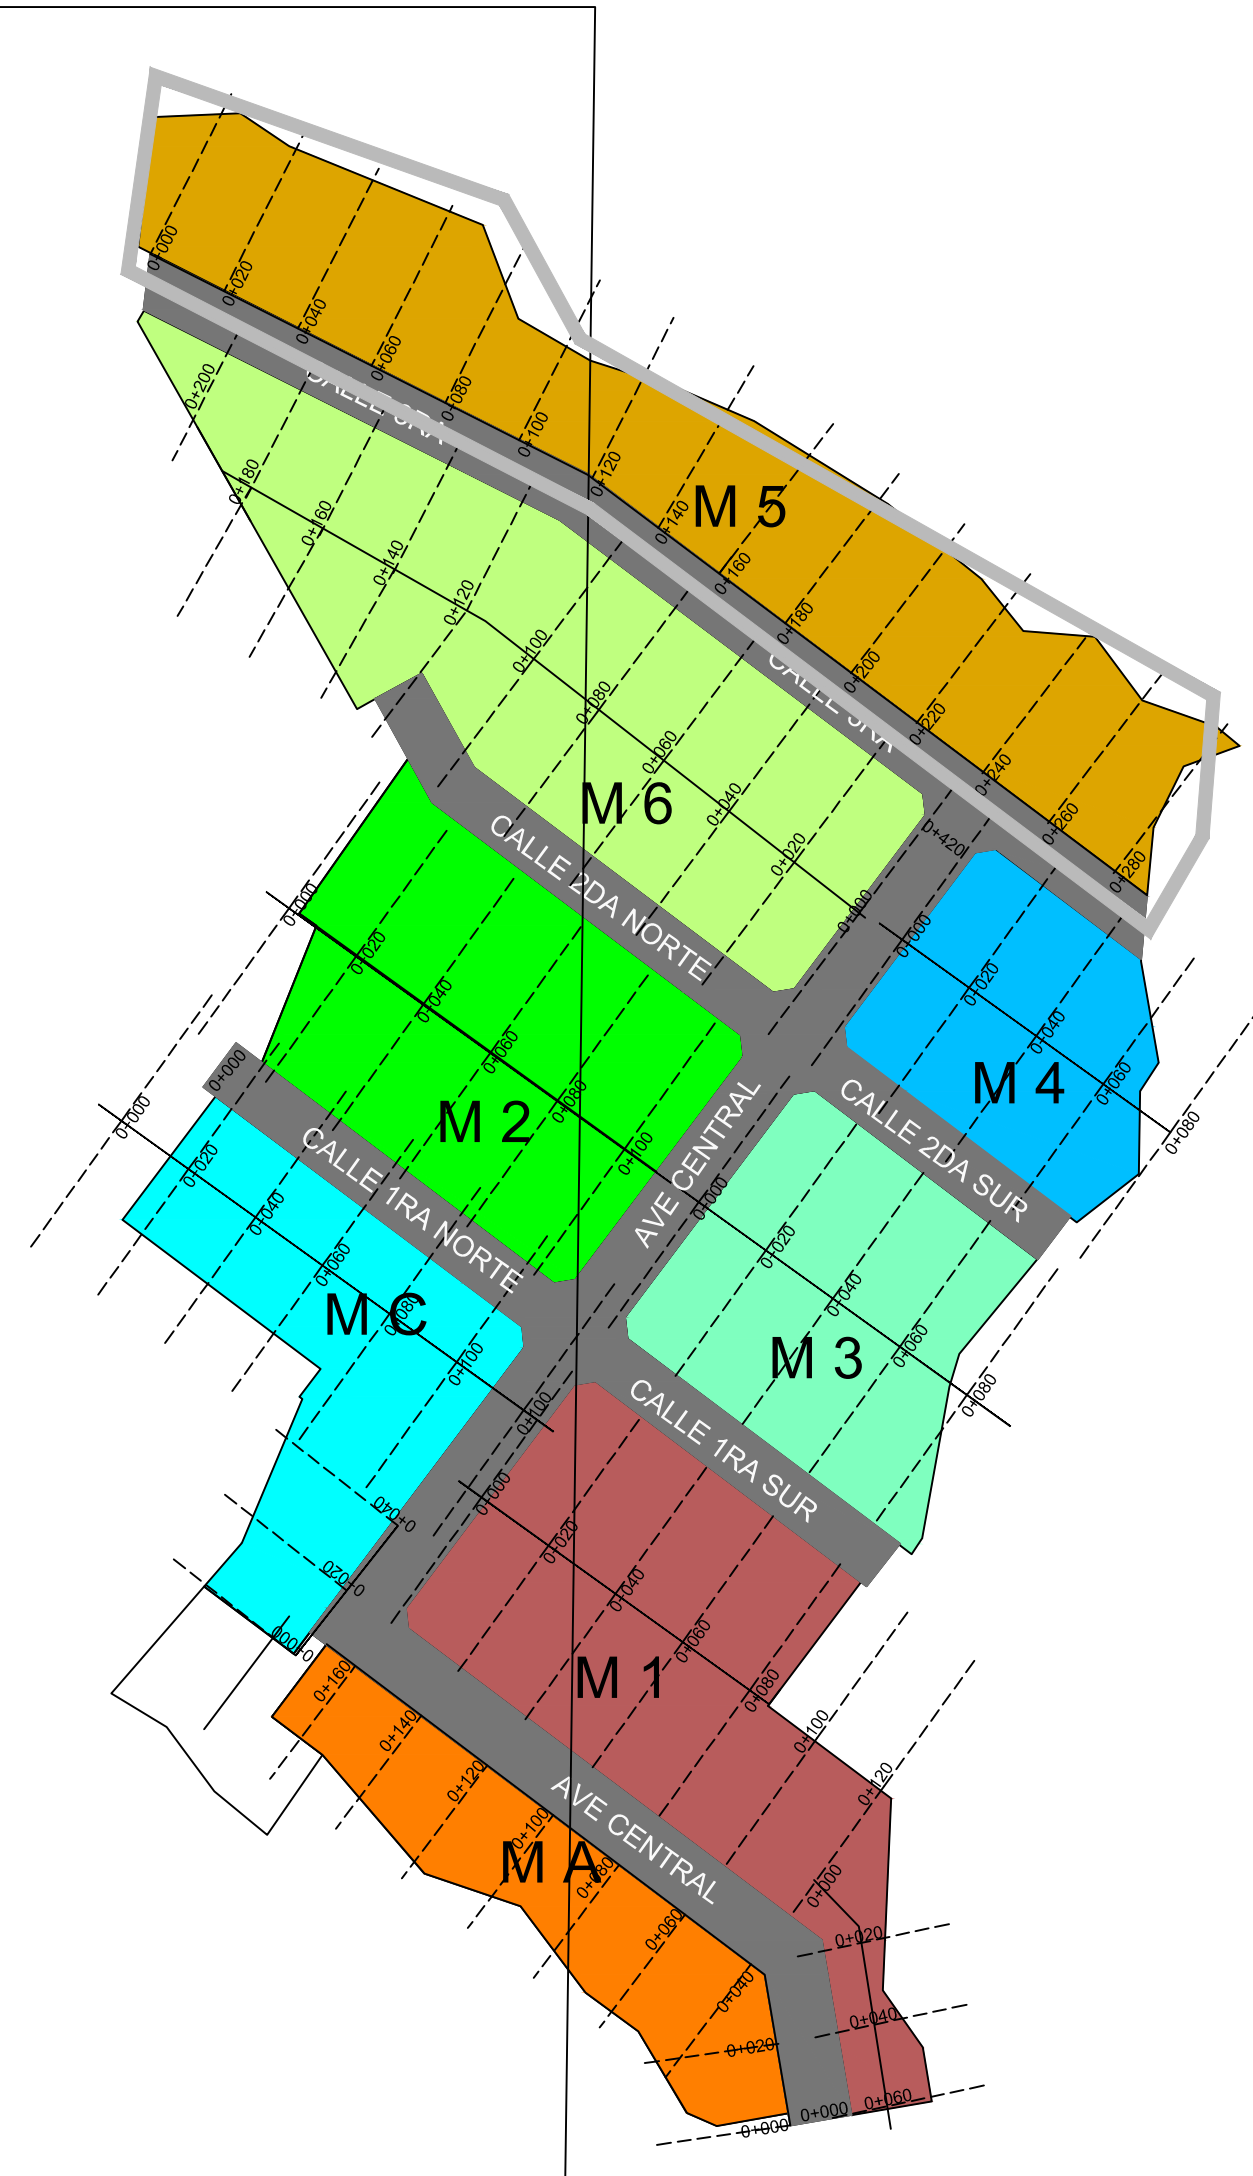
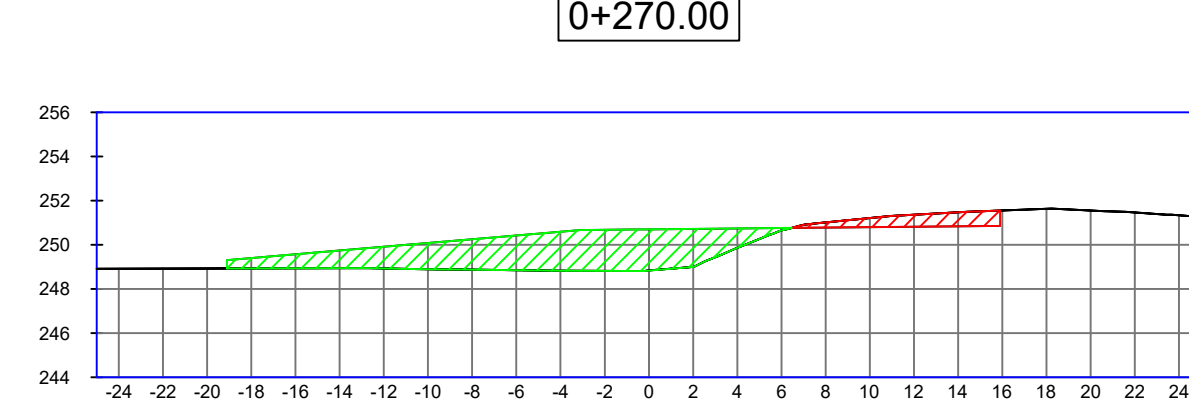
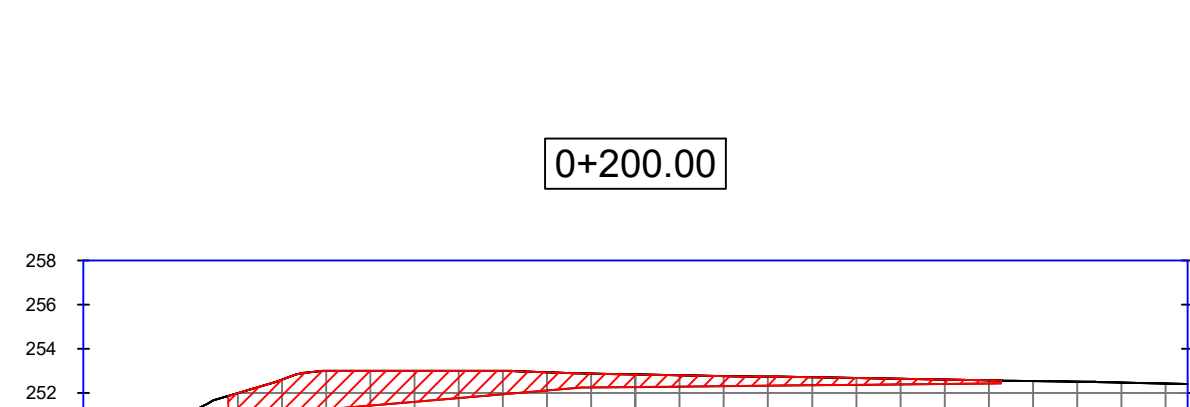
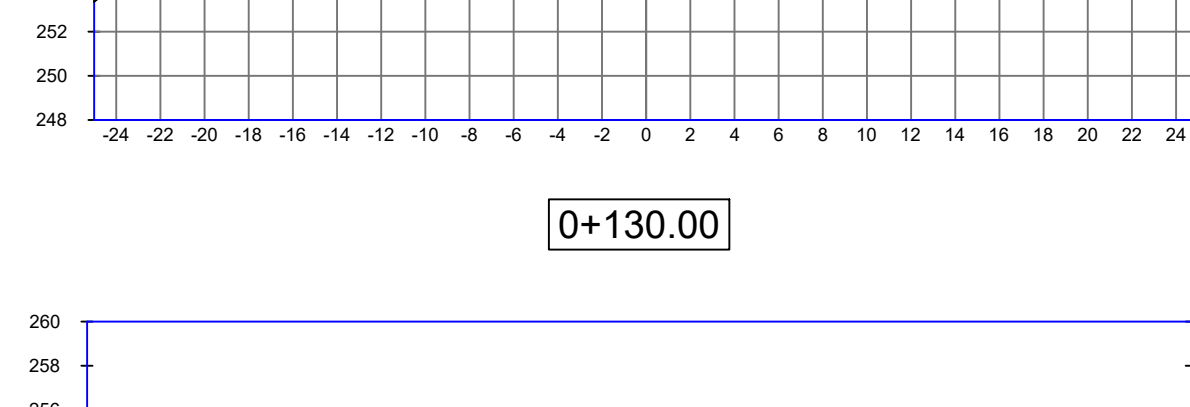
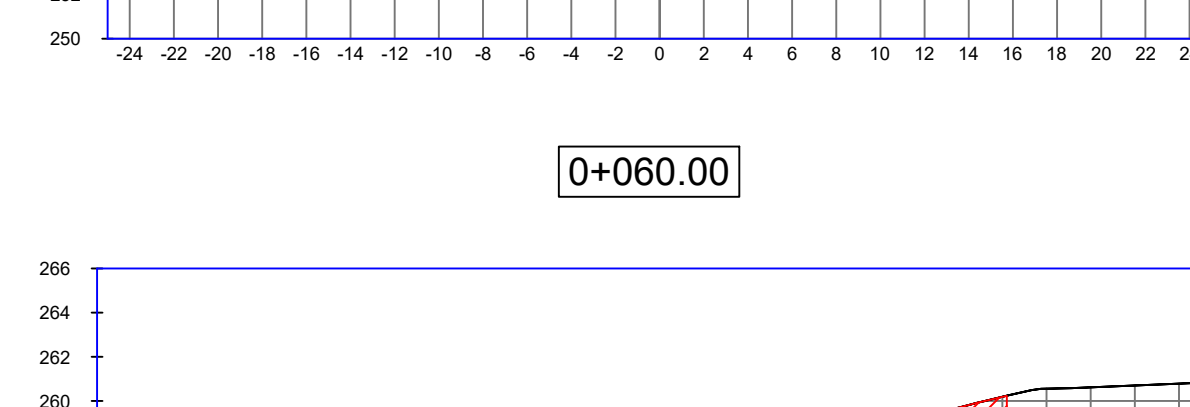
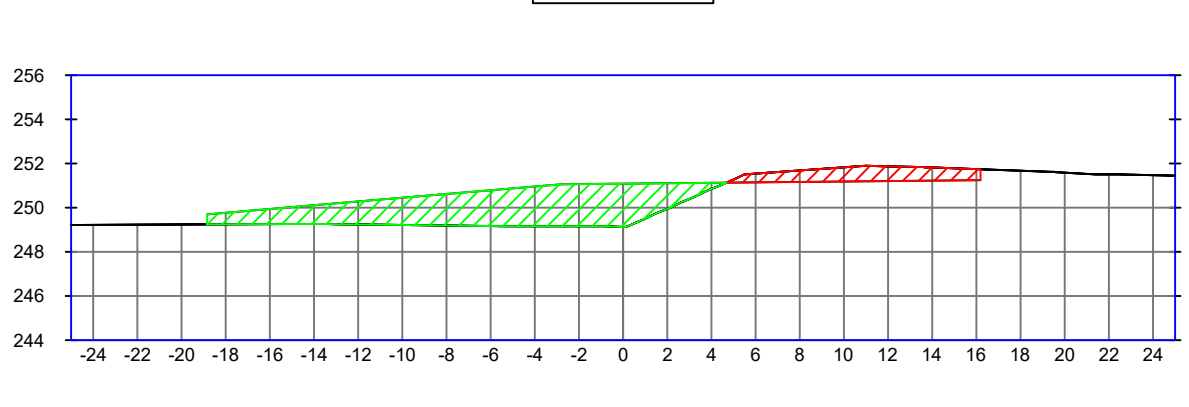
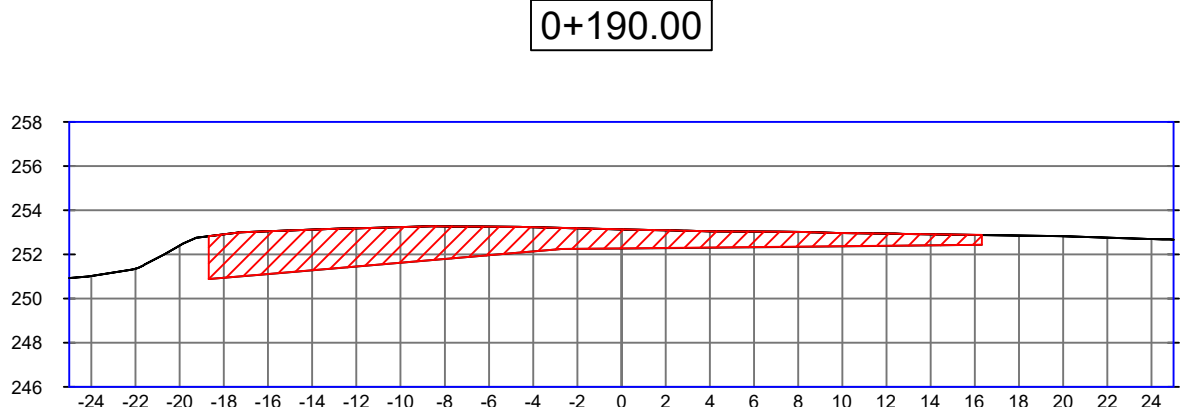
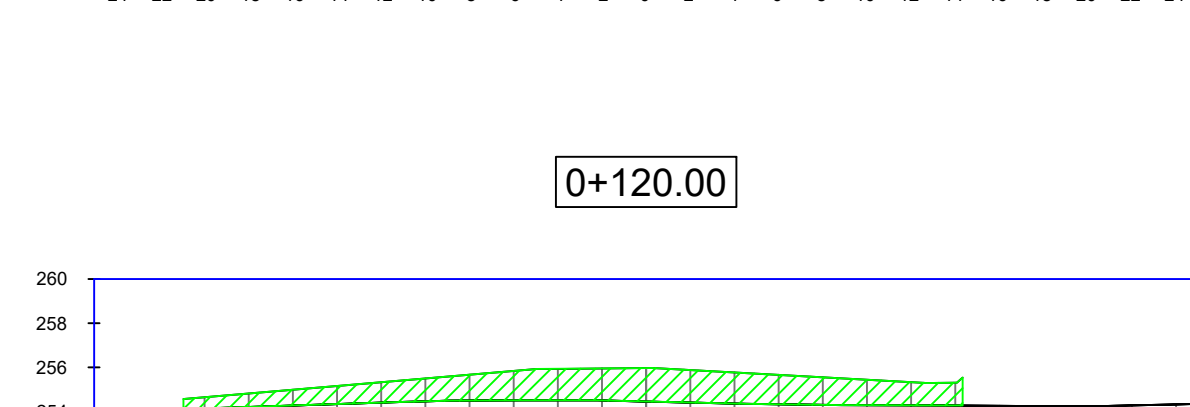
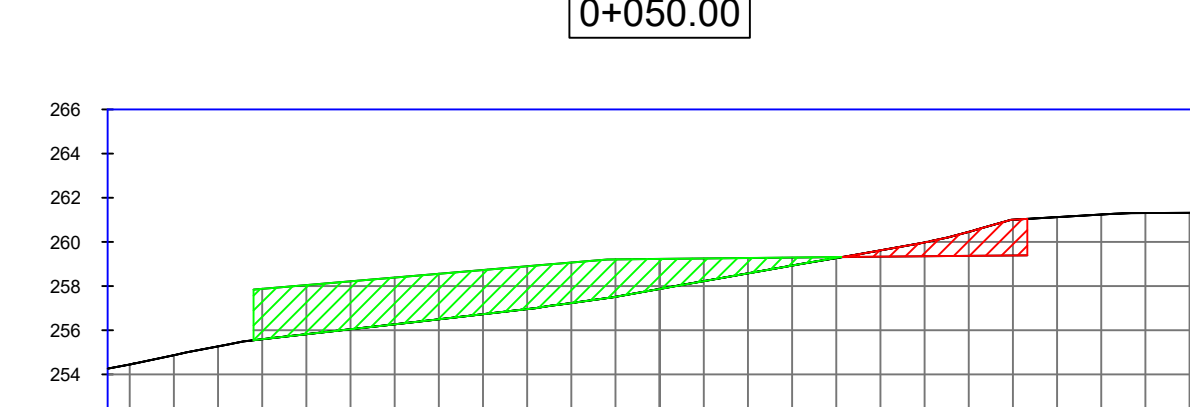
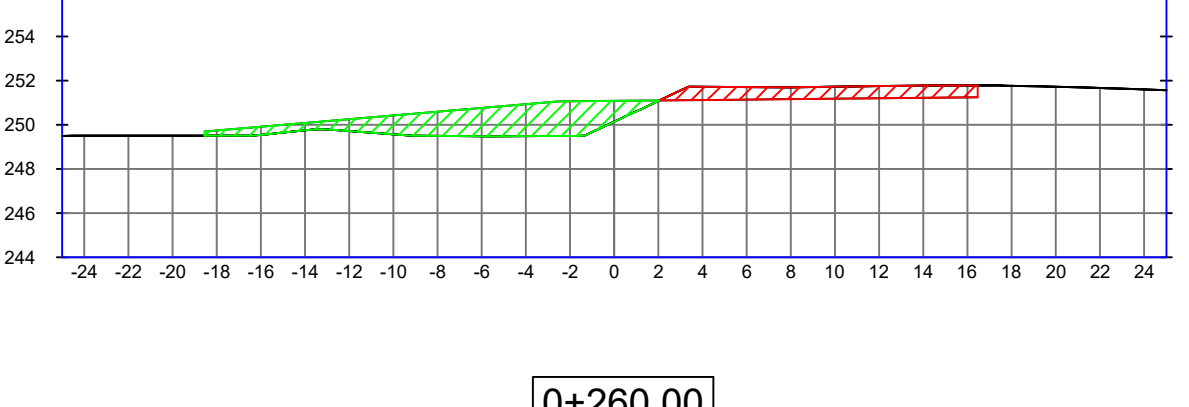
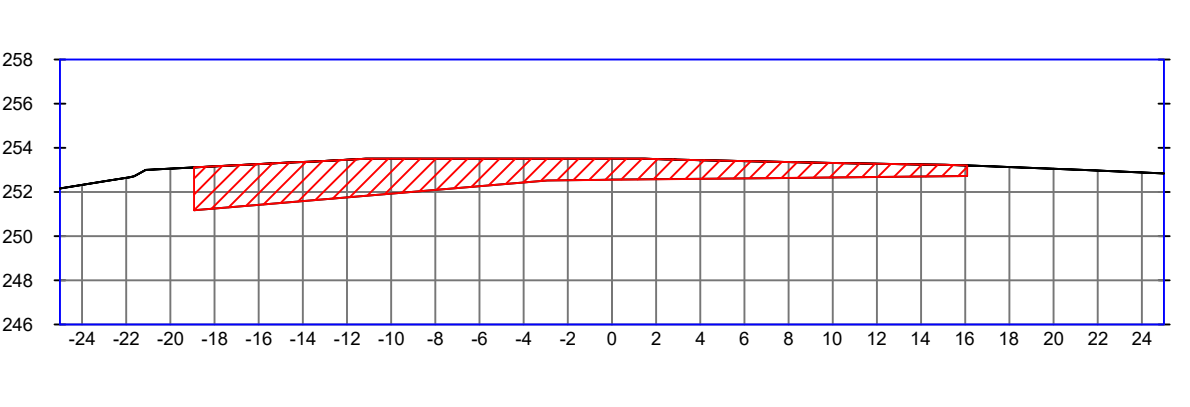
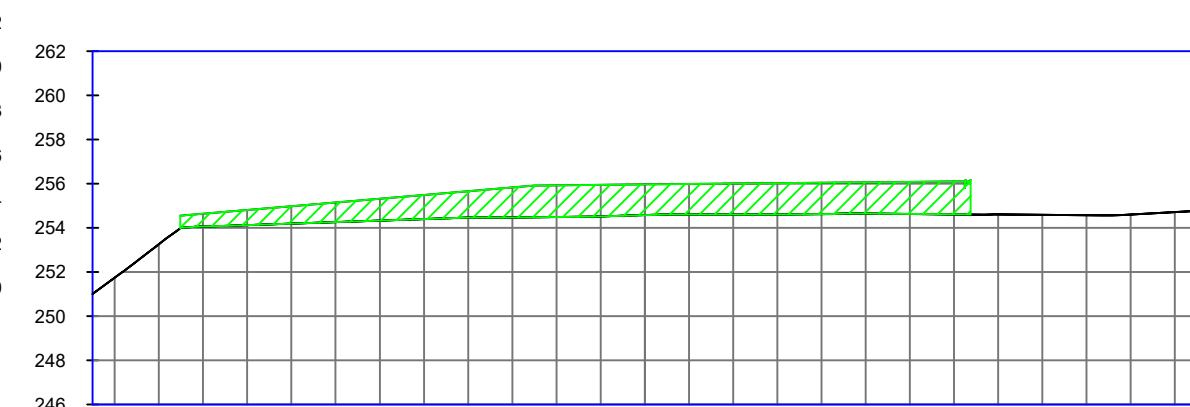
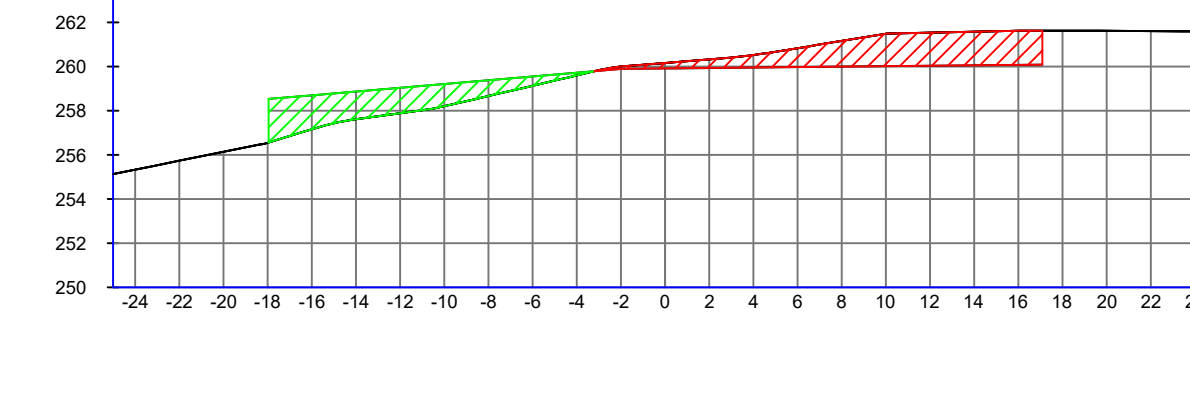
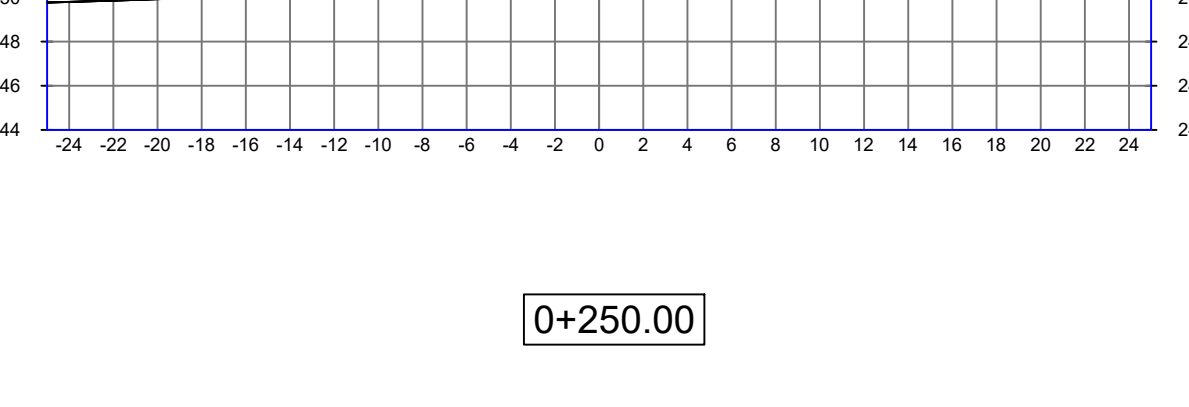
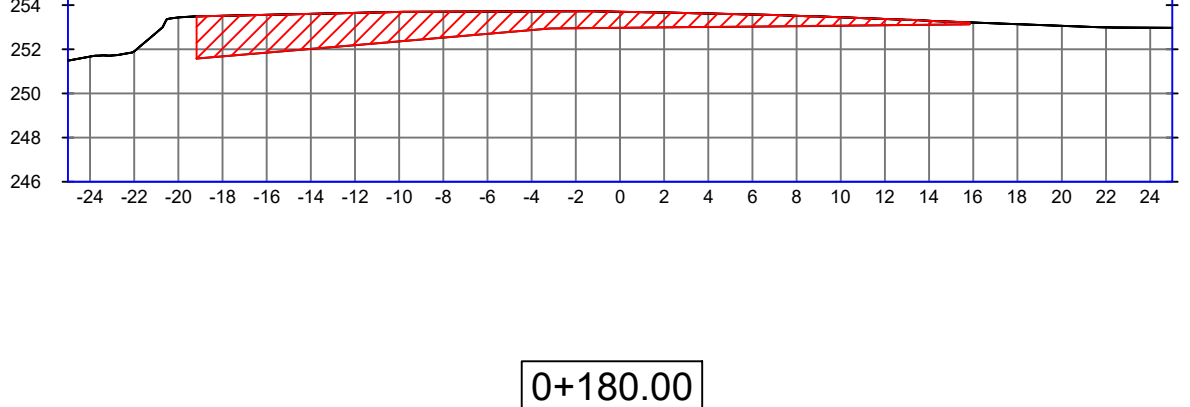
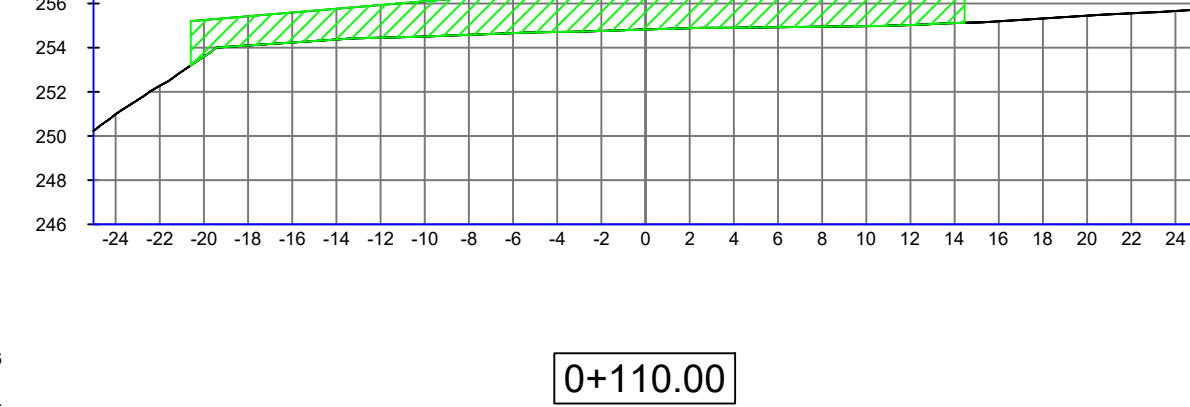
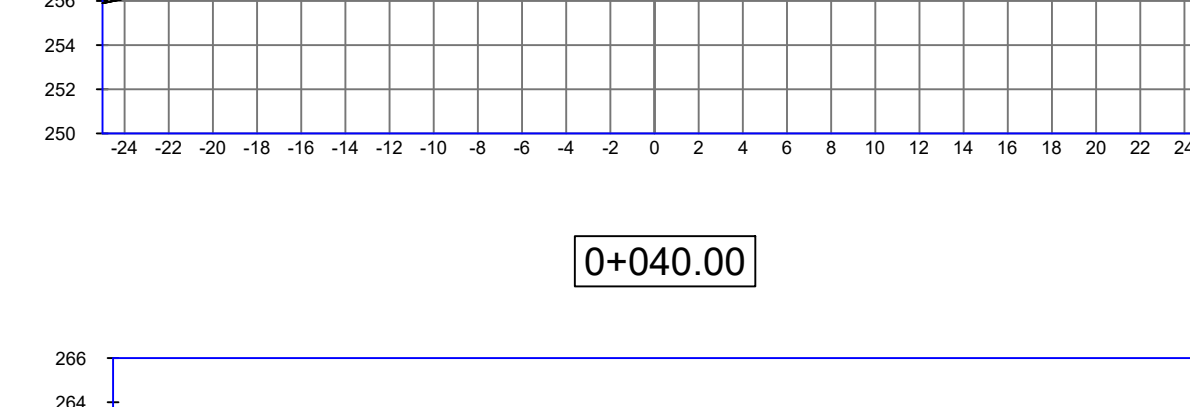
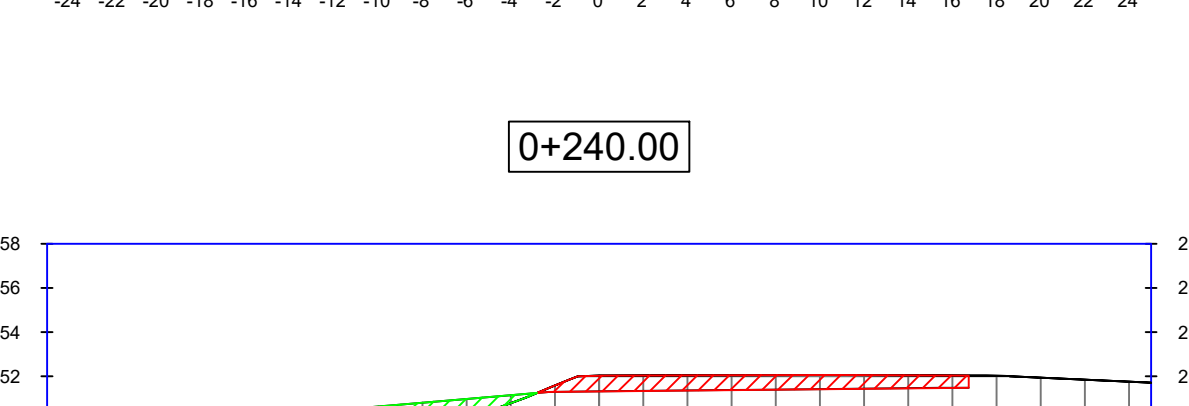
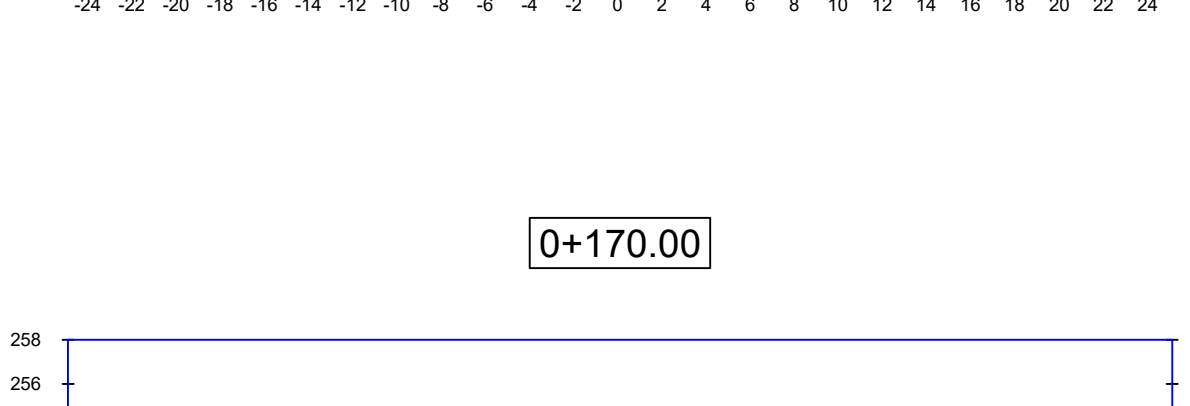
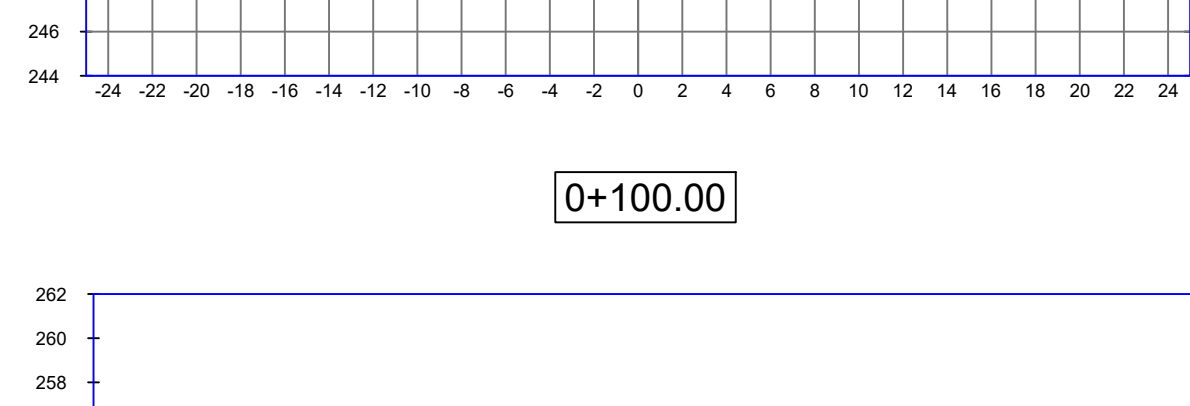
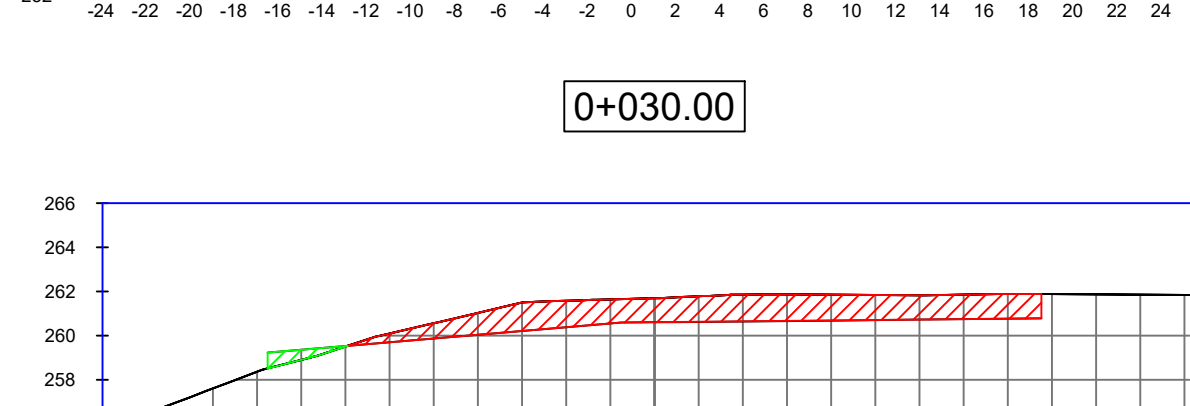
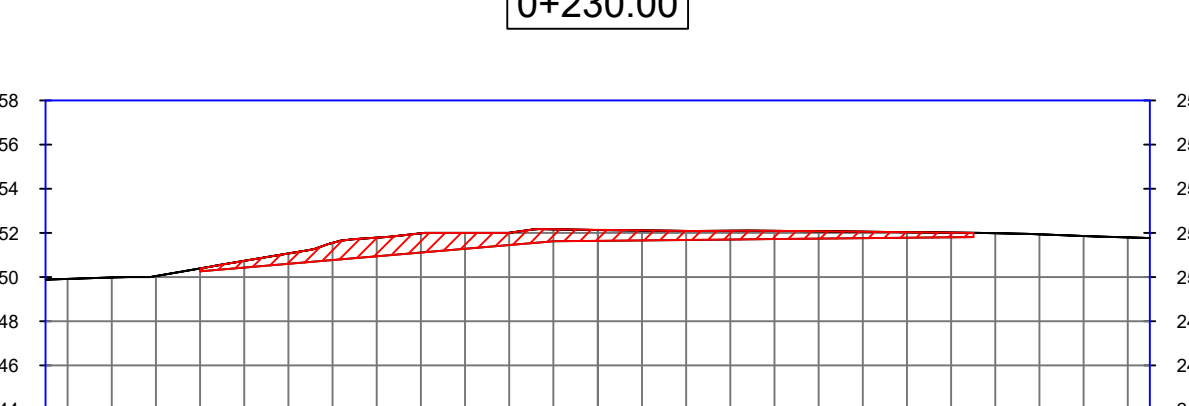
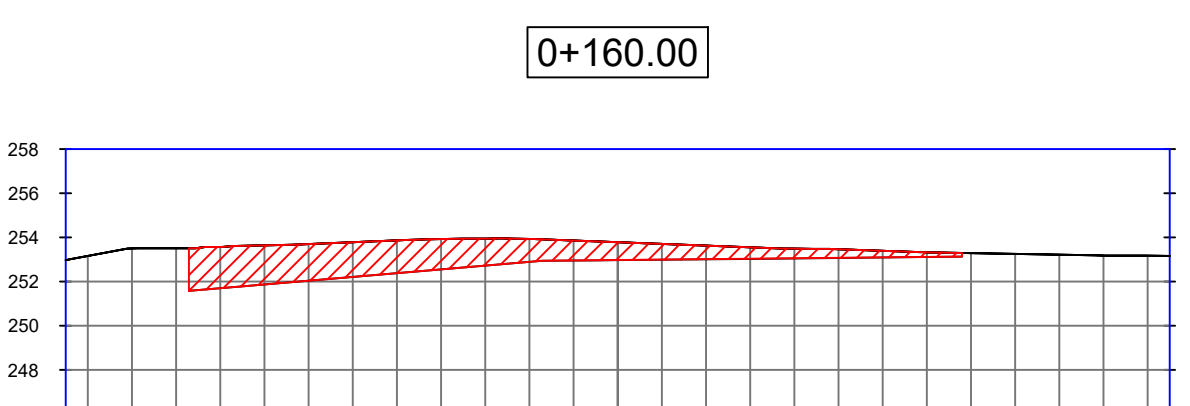
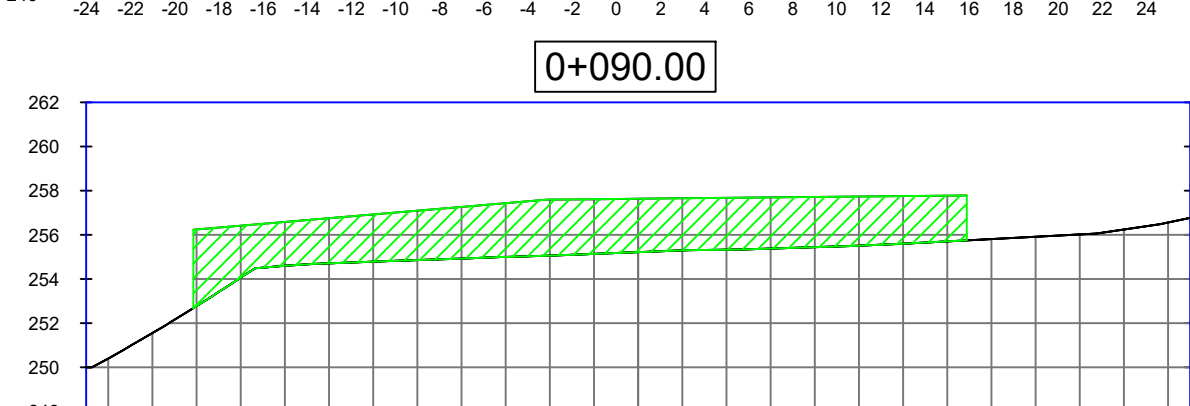
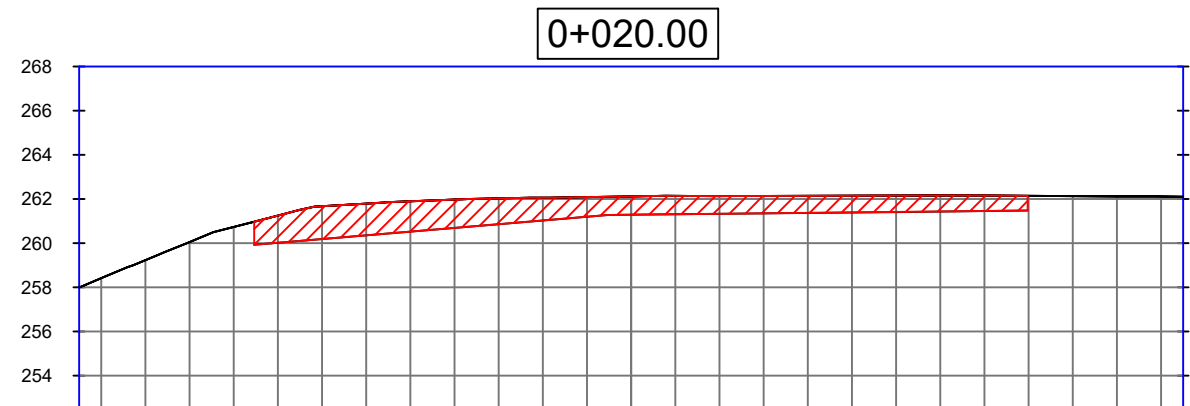
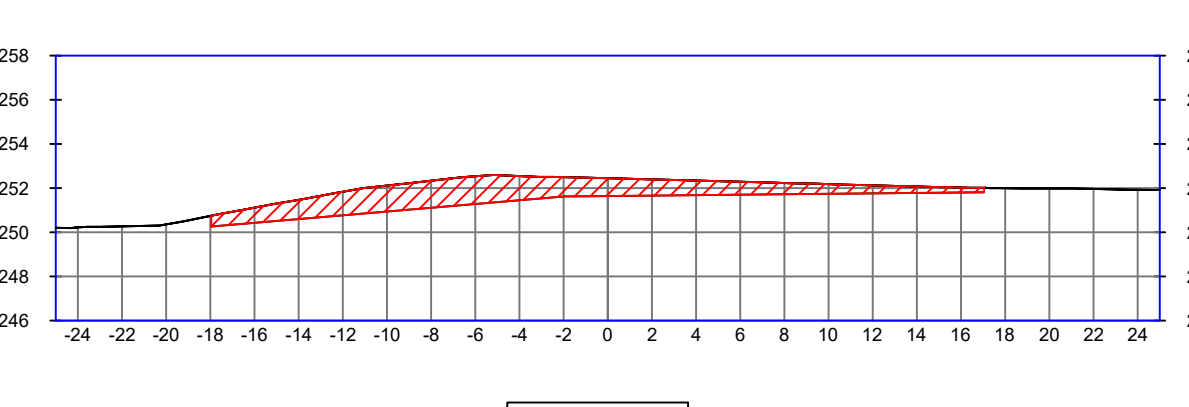
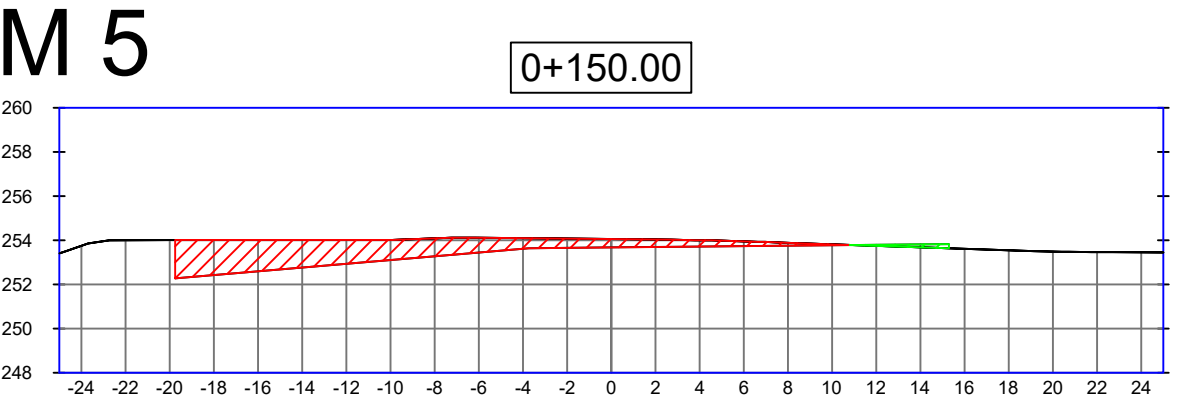
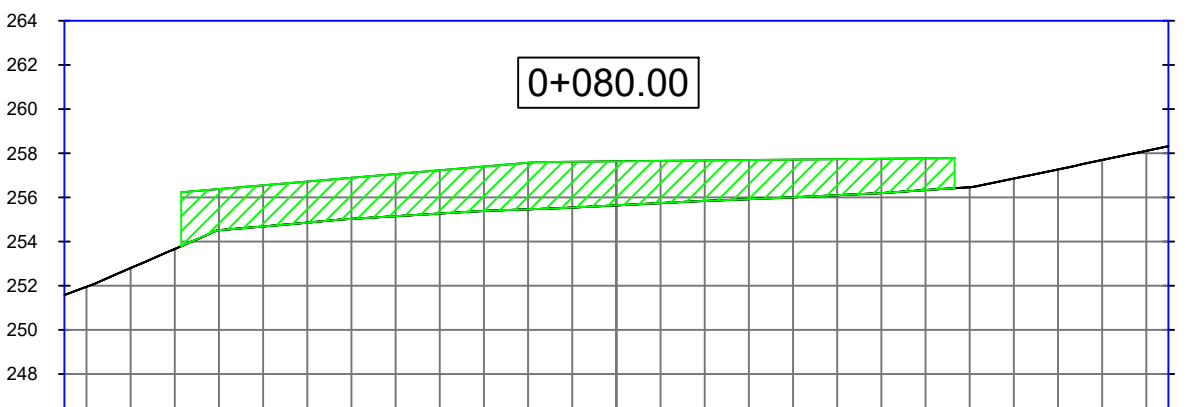


GREEN DOLEGA VILLAGE
SECCIONES TRANSVERSALES POR MANZANAS
M 5

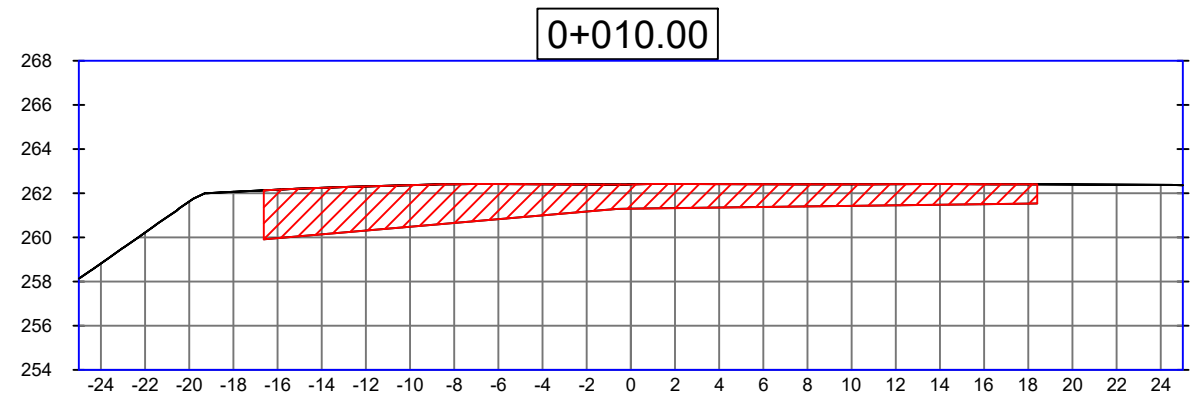

Total Volume Table						
Station	Fill Area	Cut Area	Fill Volume	Cut Volume	Cumulative Fill Vol	Cumulative Cut Vol
0+010.00	0.00	46.95	0.00	0.00	0.00	0.00
0+020.00	0.00	34.35	0.00	406.49	0.00	406.49
0+030.00	1.41	32.59	7.03	334.71	7.03	741.21
0+040.00	14.23	18.87	78.17	257.32	85.21	998.53
0+050.00	42.23	6.62	282.28	127.46	367.48	1125.99
0+060.00	46.87	4.82	445.49	57.20	812.97	1183.19
0+070.00	74.22	0.00	605.46	24.10	1418.43	1207.29
0+080.00	65.15	0.00	696.86	0.00	2115.29	1207.29
0+090.00	80.87	0.00	730.08	0.00	2845.38	1207.29
0+100.00	57.94	0.00	694.04	0.00	3539.42	1207.29
0+110.00	43.42	0.00	506.81	0.00	4046.23	1207.29
0+120.00	39.57	0.00	419.67	0.00	4465.90	1207.29
0+130.00	21.51	3.30	305.38	16.52	4771.28	1223.82
0+140.00	6.69	8.20	140.99	57.54	4912.27	1281.36
0+150.00	0.44	21.15	35.65	146.77	4947.93	1428.13
0+160.00	0.00	34.83	2.20	279.92	4950.12	1708.05
0+170.00	0.00	31.69	0.00	332.60	4950.12	2040.65
0+180.00	0.00	39.46	0.00	355.73	4950.12	2396.38
0+190.00	0.00	38.82	0.00	391.39	4950.12	2787.77
0+200.00	0.00	27.96	0.00	333.91	4950.12	3121.68

Total Volume Table						
Station	Fill Area	Cut Area	Fill Volume	Cut Volume	Cumulative Fill Vol	Cumulative Cut Vol
0+210.00	0.00	27.41	0.00	276.85	4950.12	3398.54
0+220.00	0.00	26.31	0.00	268.60	4950.12	3667.13
0+230.00	0.00	16.92	0.00	219.87	4950.12	3887.00
0+240.00	6.01	12.16	30.03	145.41	4980.16	4032.41
0+250.00	17.48	7.71	117.46	99.36	5097.62	4131.77
0+260.00	28.77	6.18	231.29	69.45	5328.91	4201.22
0+270.00	30.43	4.31	296.03	52.44	5624.94	4253.66
0+280.00	57.09	0.00	437.59	21.53	6062.52	4275.19