

	INFORME No.	INF 014-00-10-21	
	FECHA: 21 DE JUNIO 2021		
	RUIDO AMBIENTAL		

DATOS DE LA EMPRESA

NOMBRE DE LA EMPRESA	ECOSOLUTIONS MGB INC.		
TELÉFONO	394-8522	CELULAR	6781-0726
TÉCNICO INSTRUMENTISTA	Mitzi González B.	 EMPRESA AUDITORA Y CONSULTORA AMBIENTAL DIPROCA-EAA-002-2011 DIEORA-IRC-042-2009 Telf. (507)3948522 Vista Hermosa, Calle F. Filos	
CORREO ELECTRÓNICO	mitzignb@cwpanama.net		
CONSULTOR QUE ELABORA EL INFORME	Mitzi J. González Benítez		
FIRMA DEL CONSULTOR RESPONSABLE			
REGISTRO EN EL MINISTERIO DE AMBIENTE DEL CONSULTOR	IAR 024-2003 DIPROCA- AA-013-2018		


DATOS DEL USUARIO

EMPRESA	NA
SOLICITADO POR	Lic. Javier Yap
DIRECCIÓN	Paitilla, distrito y provincia de Panamá
TELÉFONO	NA
CORREO ELECTRÓNICO	NA

INFORMACIÓN DE LA MEDICIÓN

En esta sección se presentan los datos generales del área y de la medición:


NOMBRE DEL PROYECTO	Santa Cruz Eólica
PROMOTOR	NA
DIRECCIÓN	El Piral - El Nanzal, corregimiento Pajonal, distrito Penonomé y provincia de Coclé.
TIPO DE MEDICIÓN	Línea base para estudio de impacto ambiental.
SECTOR	Construcción
FECHA DE LA MEDICIÓN	21 de junio de 2021.
MÉTODO	ISO 1996-2:2007
HORARIO	Diurno 1:05 a 2:44 p.m.

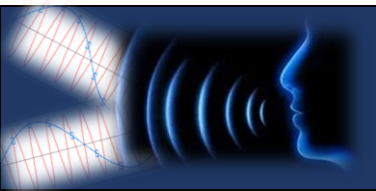	INFORME No.	INF 014-00-10-21	
	FECHA: 21 DE JUNIO 2021		
	RUIDO AMBIENTAL		

LUGAR DE LA MEDICIÓN	Punto 1: Área de proyecto (Próximo a las casas- Detrás de la casa del Sr. Juan). Coordenadas: 17P 0578782E 0945071N Punto 2: Área de proyecto (Próximo a la carretera de El Nanzal). Coordenadas: 17P 0579187E 0944861N WGS84 Precisión +/-3m
UBICACIÓN DEL INSTRUMENTO	El instrumento se ubicó a una altura del piso de 1.5 m. Piso de tierra.
INSTRUMENTOS	Sonómetro Larson Davis SoundTrack LxT Class1 serie 0006207 Preamplificador PRMLxT1 ½" -23dB serie 065112 Micrófono 377B02 serie 321154 Calibrador acústico CAL200. Serie 18028
CALIBRACIÓN	Se realizó calibración en campo antes de cada medida a un valor de 114.0 dB a una frecuencia de 1KHz. Ver certificados del equipo en el anexo 1.
TIEMPO DE INTEGRACIÓN	10 minutos
REPUESTA	Lenta
ESCALA	A
INTERCAMBIO	3dB
INCERTIDUMBRE DE LA MEDICIÓN	Ver anexo 2.
MEDICIONES DEL INSTRUMENTO	L_{max} (máximo nivel de presión acústica ponderada en el intervalo de tiempo). L_{min} (mínimo nivel de presión acústica ponderada en el intervalo de tiempo). Leq (nivel sonoro equivalente verdadero en un intervalo de tiempo). Este es la medición que se utilizará para comparar con el nivel sonoro máximo permitido en el requisito legal nacional. Todas las medidas son lecturas directas de los cálculos del mismo instrumento.
CRITERIO DE COMPARACIÓN	Decreto Ejecutivo 1 de 2004. Horario diurno: 6:00 a.m. a 9:59 p.m. Nivel sonoro máximo: 60 dBA

RESULTADOS

En el siguiente cuadro se presentan los resultados de la medición del nivel de ruido ambiental en los sitios de muestreo:

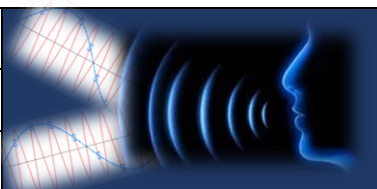	INFORME No.	INF 014-00-10-21	
	FECHA: 21 DE JUNIO 2021		
	RUIDO AMBIENTAL		

CUADRO 1: RESULTADO DE LA MEDICIÓN

SITIO DE MUESTREO	COORDENADA WGS84	RESULTADOS (DBA)			DURACIÓN
		LEQ	LMAX	LMIN	
DIURNO					
Punto 1: Área de proyecto (Próximo a las casas- Detrás de la casa del Sr. Juan).	0578782E 0945071N	49.4	64.9	35.9	1:05 p.m. 1:15 p.m.
OBSERVACIONES:		FOTOS DEL PUNTO DE MEDICIÓN:			
Horario: Diurno Estado climatológico al momento de la medición: Nublado Característica del sitio de medición: • Ruido continuo. • Área abierta • Piso de tierra húmedo • Área con vegetación cubre suelo y parches boscosos dispersos. Distancia de la fuente de ruido principal al equipo de medición: 20m aves Eventos que se dieron durante la medición: • Aves cantando • En el fondo se escuchaba el ruido de una motosierra. • Perro escarbando emitiendo sonidos. Nota: No se observaron fuentes importantes de ruido ambiental.		 			

	INFORME No.	INF 014-00-10-21	
	FECHA: 21 DE JUNIO 2021		
	RUIDO AMBIENTAL		

SITIO DE MUESTREO	COORDENADA WGS84	RESULTADOS (DBA)			DURACIÓN
		LEQ	LMAX	LMIN	
DIURNO					
Punto 2: Área de proyecto (Próximo a la carretera de El Nanzal).	0579187E 0944861N	51.5	75	37.8	2:34 p.m. 2:44 p.m.
OBSERVACIONES:		FOTOS DEL PUNTO DE MEDICIÓN:			
Horario: Diurno Estado climatológico al momento de la medición: Nublado Característica del sitio de medición: • Ruido continuo. • Área abierta • Piso de tierra húmedo • Área con vegetación cubre suelo y árboles y arbustos dispersos. • Área elevada respecto a las calles (Próximo a la calle principal de El Nanzal) Distancia de la fuente de ruido principal al equipo de medición: Aves 20 m. Eventos que se dieron durante la medición: • Aves cantando • Personas conversando Nota: Durante la medición no pasaron vehículos por las calles.					

Las condiciones climáticas se consideraron al momento de realizar las mediciones de ruido ambiental, dado que éste puede influir en los resultados, especialmente la velocidad del viento y la temperatura; ya que estos parámetros climatológicos están relacionados a la propagación del ruido. A continuación, el cuadro con la descripción de los parámetros climatológicos medidos:


	INFORME No.	INF 014-00-10-21	
	FECHA: 21 DE JUNIO 2021		
	INFORME No.		

CUADRO 2: RESULTADOS DE LAS MEDICIONES DE PARÁMETROS CLIMATOLÓGICOS EN EL SITIO DE MUESTREO.

Parámetro	Punto 1	Punto 2
Hora	1:05 p.m. 1:15 p.m.	2:34 p.m. 2:44 p.m.
Humedad (%)	84.4	81.5
Presión Barométrica (hPa)	994.1	995.3
Altitud (m) considerando la presión barométrica	159	148
Viento (m/s)	0	0.5 a 1.1
Temperatura (°C)	25.3	26.3

El **Gráfico 1**, presenta la comparación del nivel de ruido (Leq) reportado durante el horario diurno en los sitios de muestreo y el valor establecido en el Decreto Ejecutivo No. 1 del 2004.

GRÁFICO 1: COMPARACIÓN DEL RUIDO AMBIENTAL DIURNO EN EL SITIO DE MUESTREO VERSUS LA NORMA APLICABLE.

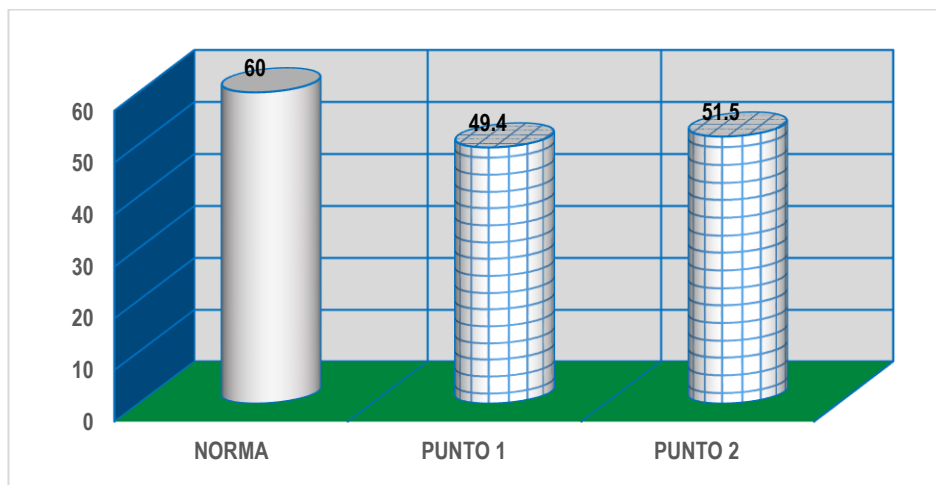

CUADRO 3: NIVELES EN DECIBELES POR BANDA DE OCTAVA.

Sitio de muestreo	Frecuencia										
	Hz						KHz				
	16	31.5	63	125	250	500	1	2	4	8	16
Punto 1	dBA										
1:05 p.m. 1:15 p.m.	28	25.8	24.1	34.4	39.2	45.2	43.5	42.1	41.6	41.4	38
Punto 2	dBA										
2:34 p.m. 2:44 p.m.	28	25.9	24.2	28.3	36.7	46.6	48.2	43.4	42.2	41.2	38.1

	INFORME No.	INF 014-00-10-21	
	FECHA: 21 DE JUNIO 2021		
	RUIDO AMBIENTAL		

CONCLUSIÓN

- El nivel del ruido ambiental, reportado en el **PUNTO 1** es de **49.4 dBA (1:05 p.m. a 1:15 p.m.)** y en el **PUNTO 2**, es de **51.5dBA (2:34 p.m. a 2:44 p.m.)**; valores que están por debajo de los **60dBA** establecidos en el Decreto Ejecutivo No. 1 de 2004 para el horario diurno.
- La incertidumbre de la medición considerando las condiciones climáticas y otros factores es de +/- 5.39 dBA.

DELARACIONES Y NOTAS

- Los resultados de este informe de medición de ruido ambiental diurno, son válidos únicamente para los sitios muestreados, relacionados a este informe.
- Los resultados obtenidos son lecturas directas del equipo de medición Sonómetro Larson Davis SoundTrack LxT Class1 serie 0006207
- Las opiniones o interpretaciones sobre los resultados quedan bajo completa responsabilidad de los usuarios.

CERTIFICACIONES

- Certificado de calibración del SoundTrack LxT Class1 serie 0006207 y del calibrador acústico CAL200. Serie 18028

Calibration Certificate

Certificate Number 2020007671

Customer:

ITS Holding Services, S.A.

Urbanizacion Chanis

Via Principal Edificio J. Trest NO. 145

, 0843-01133, Panama

Model Number LxT1
Serial Number 0006207
Test Results **Pass**

Initial Condition As Manufactured

Description SoundTrack LxT Class 1
Class 1 Sound Level Meter
Firmware Revision: 2.403

Procedure Number D0001.8384
Technician Kyle Holm
Calibration Date 13 Jul 2020
Calibration Due
Temperature 23.84 °C ± 0.25 °C
Humidity 50.2 %RH ± 2.0 %RH
Static Pressure 85.84 kPa ± 0.13 kPa

Evaluation Method **Tested with:** **Data reported in dB re 20 µPa.**

Larson Davis PRMLxT1. S/N 065112
PCB 377B02. S/N 321154
Larson Davis CAL200. S/N 9079
Larson Davis CAL291. S/N 0108

Compliance Standards Compliant to Manufacturer Specifications and the following standards when combined with Calibration Certificate from procedure D0001.8378:

IEC 60651:2001 Type 1	ANSI S1.4-2014 Class 1
IEC 60804:2000 Type 1	ANSI S1.4 (R2006) Type 1
IEC 61252:2002	ANSI S1.11 (R2009) Class 1
IEC 61260:2001 Class 1	ANSI S1.25 (R2007)
IEC 61672:2013 Class 1	ANSI S1.43 (R2007) Type 1

Issuing lab certifies that the instrument described above meets or exceeds all specifications as stated in the referenced procedure (unless otherwise noted). It has been calibrated using measurement standards traceable to the International System of Units (SI) through the National Institute of Standards and Technology (NIST), or other national measurement institutes, and meets the requirements of ISO/IEC 17025:2005.

Test points marked with a ‡ in the uncertainties column do not fall within this laboratory's scope of accreditation.

The quality system is registered to ISO 9001:2015.

This calibration is a direct comparison of the unit under test to the listed reference standards and did not involve any sampling plans to complete. No allowance has been made for the instability of the test device due to use, time, etc. Such allowances would be made by the customer as needed.

The uncertainties were computed in accordance with the ISO Guide to the Expression of Uncertainty in Measurement (GUM). A coverage factor of approximately 2 sigma (k=2) has been applied to the standard uncertainty to express the expanded uncertainty at approximately 95% confidence level.

This report may not be reproduced, except in full, unless permission for the publication of an approved abstract is obtained in writing from the organization issuing this report.

Correction data from Larson Davis LxT Manual for SoundTrack LxT & SoundExpert Lxt, I770.01 Rev J Supporting Firmware Version 2.301, 2015-04-30

LARSON DAVIS - A PCB PIEZOTRONICS DIV.
1681 West 820 North
Provo, UT 84601, United States
716-684-0001



Certificate Number 2020007671

For 1/4" microphones, the Larson Davis ADP024 1/4" to 1/2" adaptor is used with the calibrators and the Larson Davis ADP043 1/4" to 1/2" adaptor is used with the preamplifier.

Calibration Check Frequency: 1000 Hz; Reference Sound Pressure Level: 114 dB re 20 µPa

Periodic tests were performed in accordance with procedures from IEC 61672-3:2013 / ANSI/ASA S1.4-2014/Part3.

Pattern approval for IEC 61672-1:2013 / ANSI/ASA S1.4-2014/Part 1 successfully completed by Physikalisch-Technische Bundesanstalt (PTB) on 2007-10-09 reference number PTB-1.72-4034218.

The sound level meter submitted for testing successfully completed the periodic tests of IEC 61672-3:2013 / ANSI/ASA S1.4-2014/Part 3, for the environmental conditions under which the tests were performed. As evidence was publicly available, from an independent testing organization responsible for approving the results of pattern-evaluation tests performed in accordance with IEC 61672-2:2013 / ANSI/ASA S1.4-2014/Part 2, to demonstrate that the model of sound level meter fully conformed to the class 1 specifications in IEC 61672-1:2013 / ANSI/ASA S1.4-2014/Part 1; the sound level meter submitted for testing conforms to the class 1 specifications in IEC 61672-1:2013 / ANSI/ASA S1.4-2014/Part 1.

Standards Used			
Description	Cal Date	Cal Due	Cal Standard
Larson Davis CAL291 Residual Intensity Calibrator	2019-09-18	2020-09-18	001250
Hart Scientific 2626-S Humidity/Temperature Sensor	2019-07-18	2020-07-18	006946
Larson Davis CAL200 Acoustic Calibrator	2019-07-22	2020-07-22	007027
Larson Davis Model 831	2020-03-02	2021-03-02	007182
PCB 377A13 1/2 inch Prepolarized Pressure Microphone	2020-03-05	2021-03-05	007185
SRS DS360 Ultra Low Distortion Generator	2020-04-14	2021-04-14	007635

Acoustic Calibration

Measured according to IEC 61672-3:2013 10 and ANSI S1.4-2014 Part 3: 10

Measurement	Test Result [dB]	Lower Limit [dB]	Upper Limit [dB]	Expanded Uncertainty [dB]	Result
1000 Hz	114.00	113.80	114.20	0.14	Pass

Loaded Circuit Sensitivity

Measurement	Test Result [dB re 1 V / Pa]	Lower Limit [dB re 1 V / Pa]	Upper Limit [dB re 1 V / Pa]	Expanded Uncertainty [dB]	Result
1000 Hz	-50.14	-52.44	-48.33	0.14	Pass

-- End of measurement results--

Acoustic Signal Tests, C-weighting

Measured according to IEC 61672-3:2013 12 and ANSI S1.4-2014 Part 3: 12 using a comparison coupler with Unit Under Test (UUT) and reference SLM using slow time-weighted sound level for compliance to IEC 61672-1:2013 5.5; ANSI S1.4-2014 Part 1: 5.5

Frequency [Hz]	Test Result [dB]	Expected [dB]	Lower Limit [dB]	Upper Limit [dB]	Expanded Uncertainty [dB]	Result
125	-0.21	-0.20	-1.20	0.80	0.23	Pass
1000	0.19	0.00	-0.70	0.70	0.23	Pass
8000	-2.43	-3.00	-5.50	-1.50	0.32	Pass

-- End of measurement results--

LARSON DAVIS - A PCB PIEZOTRONICS DIV.
1681 West 820 North
Provo, UT 84601, United States
716-684-0001



Self-generated Noise

Measured according to IEC 61672-3:2013 11.1 and ANSI S1.4-2014 Part 3: 11.1

Measurement

Test Result [dB]

A-weighted

40.50

-- End of measurement results--

-- End of Report--

Signatory: Kyle Holm

LARSON DAVIS - A PCB PIEZOTRONICS DIV.
1681 West 820 North
Provo, UT 84601, United States
716-684-0001



Calibration Certificate

Certificate Number 2020007443

Customer:

ITS Holding Services,S.A.

Urbanizacion Chanis

Via Principal Edificio J. Trest NO. 145,0843-01133,Panama

Model Number CAL200

Serial Number 18028

Test Results Pass

Initial Condition As Manufactured

Description Larson Davis CAL200 Acoustic Calibrator

Procedure Number D0001.8386

Technician Scott Montgomery

Calibration Date 8 Jul 2020

Calibration Due

Temperature 24 °C ± 0.3 °C

Humidity 34 %RH ± 3 %RH

Static Pressure 101.2 kPa ± 1 kPa

Evaluation Method The data is acquired by the insert voltage calibration method using the reference microphone's open circuit sensitivity. Data reported in dB re 20 µPa.

Compliance Standards Compliant to Manufacturer Specifications per D0001.8190 and the following standards:
IEC 60942:2017 ANSI S1.40-2006

Issuing lab certifies that the instrument described above meets or exceeds all specifications as stated in the referenced procedure (unless otherwise noted). It has been calibrated using measurement standards traceable to the SI through the National Institute of Standards and Technology (NIST), or other national measurement institutes, and meets the requirements of ISO/IEC 17025:2005.

Test points marked with a ± in the uncertainties column do not fall within this laboratory's scope of accreditation.

The quality system is registered to ISO 9001:2015.

This calibration is a direct comparison of the unit under test to the listed reference standards and did not involve any sampling plans to complete. No allowance has been made for the instability of the test device due to use, time, etc. Such allowances would be made by the customer as needed.

The uncertainties were computed in accordance with the ISO Guide to the Expression of Uncertainty in Measurement (GUM). A coverage factor of approximately 2 sigma (k=2) has been applied to the standard uncertainty to express the expanded uncertainty at approximately 95% confidence level.

This report may not be reproduced, except in full, unless permission for the publication of an approved abstract is obtained in writing from the organization issuing this report.

Standards Used

Description	Cal Date	Cal Due	Cal Standard
Agilent 34401A DMM	08/15/2019	08/15/2020	001021
Larson Davis Model 2900 Real Time Analyzer	04/02/2020	04/02/2021	001051
Microphone Calibration System	03/03/2020	03/03/2021	005446
1/2" Preamplifier	09/17/2019	09/17/2020	006506
Larson Davis 1/2" Preamplifier 7-pin LEMO	08/06/2019	08/06/2020	006507
1/2 inch Microphone - RI - 200V	12/06/2019	12/06/2020	006511
Pressure Transducer	10/18/2019	10/18/2020	007204

LARSON DAVIS - A PCB PIEZOTRONICS DIV.
1681 West 820 North
Provo, UT 84601, United States
716-684-0001

7/14/2020 1:47:25PM



LARSON DAVIS
A PCB PIEZOTRONICS DIV.

Output Level

Nominal Level [dB]	Pressure [kPa]	Test Result [dB]	Lower limit [dB]	Upper limit [dB]	Expanded Uncertainty [dB]	Result
114	101.2	114.01	113.80	114.20	0.14	Pass
94	101.2	94.01	93.80	94.20	0.14	Pass

-- End of measurement results--

Frequency

Nominal Level [dB]	Pressure [kPa]	Test Result [Hz]	Lower limit [Hz]	Upper limit [Hz]	Expanded Uncertainty [Hz]	Result
114	101.2	1,000.21	990.00	1,010.00	0.20	Pass
94	101.2	1,000.23	990.00	1,010.00	0.20	Pass

-- End of measurement results--

Total Harmonic Distortion + Noise (THD+N)

Nominal Level [dB]	Pressure [kPa]	Test Result [%]	Lower limit [%]	Upper limit [%]	Expanded Uncertainty [%]	Result
114	101.2	0.46	0.00	2.00	0.25 ‡	Pass
94	101.2	0.50	0.00	2.00	0.25 ‡	Pass

-- End of measurement results--

Level Change Over Pressure

Tested at: 114 dB, 25 °C, 30 %RH

Nominal Pressure [kPa]	Pressure [kPa]	Test Result [dB]	Lower limit [dB]	Upper limit [dB]	Expanded Uncertainty [dB]	Result
108.0	108.0	0.02	-0.30	0.30	0.04 ‡	Pass
101.3	101.3	0.00	-0.30	0.30	0.04 ‡	Pass
92.0	92.0	-0.03	-0.30	0.30	0.04 ‡	Pass
83.0	83.1	-0.07	-0.30	0.30	0.04 ‡	Pass
74.0	74.1	-0.11	-0.30	0.30	0.04 ‡	Pass
65.0	64.9	-0.16	-0.30	0.30	0.04 ‡	Pass

-- End of measurement results--

Frequency Change Over Pressure

Tested at: 114 dB, 25 °C, 30 %RH

Nominal Pressure [kPa]	Pressure [kPa]	Test Result [Hz]	Lower limit [Hz]	Upper limit [Hz]	Expanded Uncertainty [Hz]	Result
108.0	108.0	0.00	-10.00	10.00	0.20 ‡	Pass
101.3	101.3	0.00	-10.00	10.00	0.20 ‡	Pass
92.0	92.0	0.00	-10.00	10.00	0.20 ‡	Pass
83.0	83.1	0.00	-10.00	10.00	0.20 ‡	Pass
74.0	74.1	0.00	-10.00	10.00	0.20 ‡	Pass
65.0	64.9	-0.01	-10.00	10.00	0.20 ‡	Pass

-- End of measurement results--

LARSON DAVIS - A PCB PIEZOTRONICS DIV.

1681 West 820 North

Provo, UT 84601, United States

716-684-0001



LARSON DAVIS
A PCB PIEZOTRONICS DIV.

Total Harmonic Distortion + Noise (THD+N) Over Pressure

Tested at: 114 dB, 25 °C, 30 %RH

Nominal Pressure [kPa]	Pressure [kPa]	Test Result [%]	Lower limit [%]	Upper limit [%]	Expanded Uncertainty [%]	Result
108.0	108.0	0.46	0.00	2.00	0.25 ‡	Pass
101.3	101.3	0.46	0.00	2.00	0.25 ‡	Pass
92.0	92.0	0.46	0.00	2.00	0.25 ‡	Pass
83.0	83.1	0.47	0.00	2.00	0.25 ‡	Pass
74.0	74.1	0.49	0.00	2.00	0.25 ‡	Pass
65.0	64.9	0.52	0.00	2.00	0.25 ‡	Pass

-- End of measurement results--

Signatory: Scott Montgomery

LARSON DAVIS - A PCB PIEZOTRONICS DIV.
 1681 West 820 North
 Provo, UT 84601, United States
 716-684-0001



LARSON DAVIS
 A PCB PIEZOTRONICS DIV.




Model CAL200 Relative SPL vs. Temperature

Larson Davis Model CAL200 Serial Number: 18028

Model CAL200 Relative SPL vs. Temperature at 50% RH.

A 2559 Mic (SN: 2916) with a PRM901 Preamp (SN: 0176), station 9 was used to check the levels.

Test Date: 24 Apr 2020 12:18:38 PM

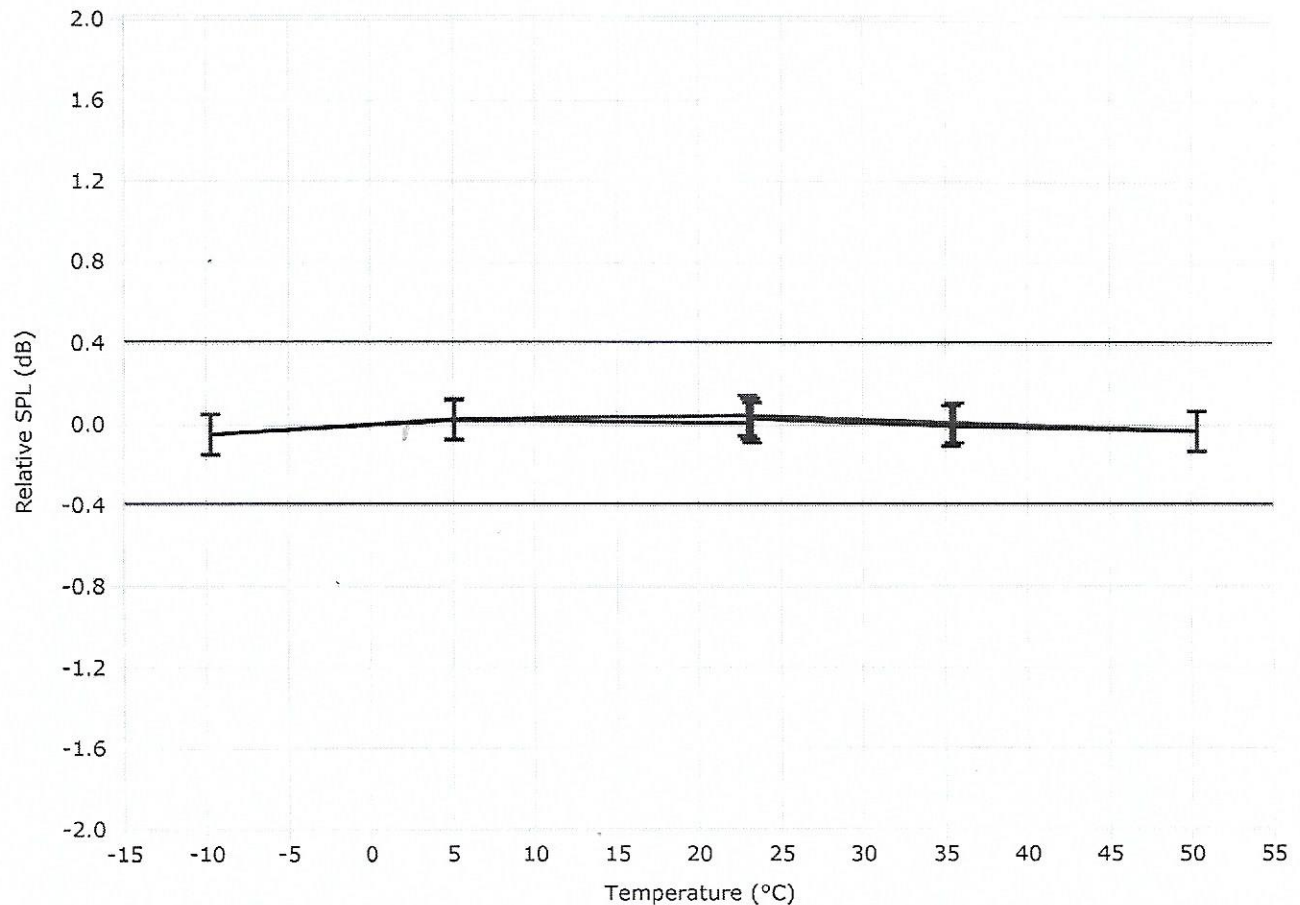

0.1dB expanded uncertainty at ~95% confidence level (k=2)

Sequence File: CAL250w200.SEQ

Test Location: Larson Davis, a division of PCB Piezotronics, Inc.
1681 West 820 North, Provo, Utah 84601
Tel: 716 684-0001 www.LarsonDavis.com




Model CAL200 Relative Frequency vs. Temperature

Larson Davis Model CAL200 Serial Number: 18028

Model CAL200 Relative Frequency vs. Temperature at 50% RH.

A 2559 Mic (SN: 2916) with a PRM901 Preamp (SN: 0176), station 9 was used to check the levels.

Test Date: 24 Apr 2020 12:18:38 PM

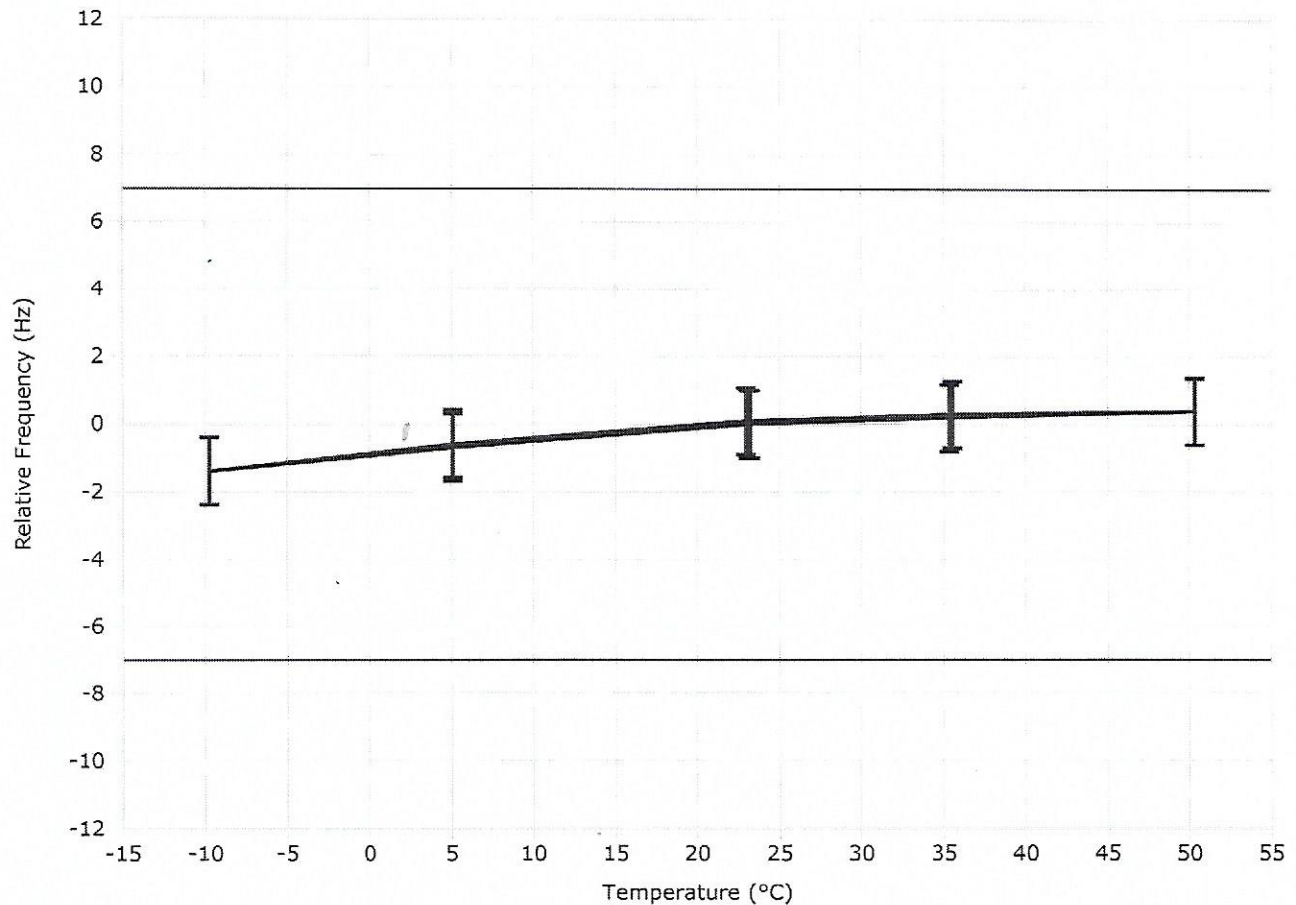

1.0 Hz expanded uncertainty at ~95% confidence level (k=2)

Sequence File: CAL250w200.SEQ

Test Location: Larson Davis, a division of PCB Piezotronics, Inc.
1681 West 820 North, Provo, Utah 84601
Tel: 716 684-0001 www.LarsonDavis.com

ANEXO


ANEXO 1: Cálculo de la incertidumbre de acuerdo al método ISO 1993-2:2007.

Debido al instrumento ¹	Debido a las condiciones operativas	Debido a las condiciones climáticas y de la superficie	Debido a el sonido residual	Incertidumbre σ_t	Incertidumbre expandida a la medida
1.0dB	X dB	Y dB	Z dB	$\sqrt{1^2 + X^2 + Y^2 + Z^2}$	$\pm 2.0\sigma_t$ dB

Donde:

X = Para determinar X se requiere de al menos tres medidas y preferiblemente 5, en condiciones de repetibilidad (mismo procedimiento, operador del equipo y el mismo lugar) y que las condiciones climáticas tengan poca influencia en los resultados.

Y = El valor depende de la distancia de la medida y de las condiciones meteorológicas.

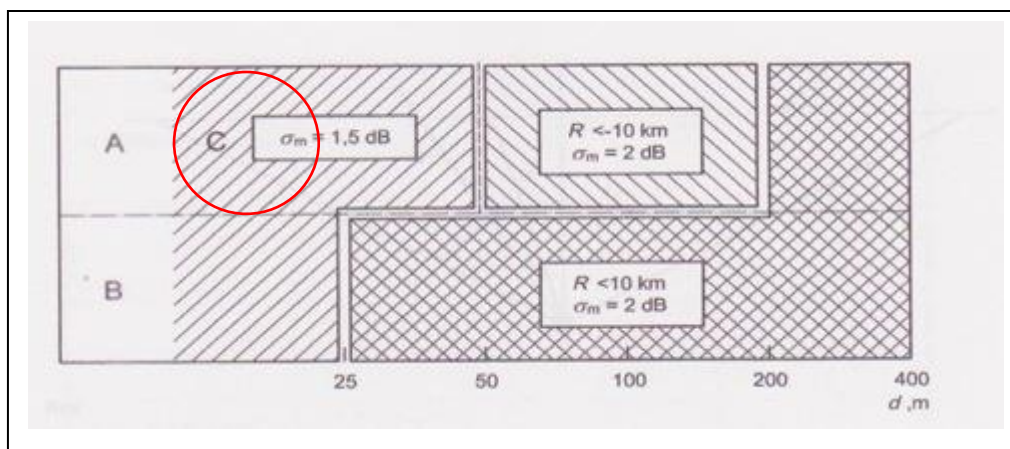

Fuente: ISO 1996-2:2007 – Anexo 1.

Observación: Para el estudio se considera una situación alta; es decir, que la fuente de emisión está por encima o igual a los 1.5m y el micrófono estaba a una altura de 1.5m o más. Desviación estándar por la distancia = 1.5dB

Z= El valor dependen de la diferencia entre el valor medido total y el sonido residual. En este caso no se considera el ruido residual puesto que no se conoce el mismo ni la regulación nacional lo requiere.

Basado en lo expuesto la incertidumbre sería:

$$\sigma_t = \sqrt{1^2 + X^2 + Y^2 + Z^2}$$

$$\sigma_t = 1.98 \text{ dBA}$$

$$\sigma_{ex} = \pm 2\sigma_t = \pm 3.95 \text{ dBA}$$

$$X^2 = 0.66 \text{ dBA } Y = 1.5 \text{ dBA } Z = 0 \text{ dBA}$$

¹ Para Instrumentos Tipo 1 que cumplan con la IEC 61672-1: 2002.

	INFORME No.	INF 014-00-10-21	
	FECHA: 21 DE JUNIO 2021		
	RUIDO AMBIENTAL		

ANEXO 2: FOTO SATELITAL DEL ÁREA DE ESTUDIO.



Fuente: Google Earth.2021
Fecha de imagen: 25 de enero de 2020

FIN DEL DOCUMENTO INF 014-00-10-21